

SW SERIES IRON-WEIGHING PLATFORMS



Lever platforms with a single load cell, suitable for weighing metal sections, rods, pipes and plates in industrial and commercial applications. Standard version is with approved load cell.

MAIN FEATURES

- Functions with 1 approved load cell protected against dust and water splashes according to IP65 standards and with OIML certification (350 Ohm input resistance).
- Sturdy painted steel section structure, and load surface with support bars, fixed edges, and flip-down edges on the operator side.
- Levers, cutters and bearings are in hardened ground chrome steel.
- Platform oscillation on steel balls and oscillation locks for avoiding overturns.
- Level.
- Up to 15 Vdc power supply
- IP67 hermetic junction box and wiring with 5m long 6-pin cable with connectors for connection to the indicator.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Connection to the indicator and calibration with CE-M 3000e single range or 3000e+3000e dual range approval (depending on the indicators used).
- Models with special sizes and capacities (ask for estimate).

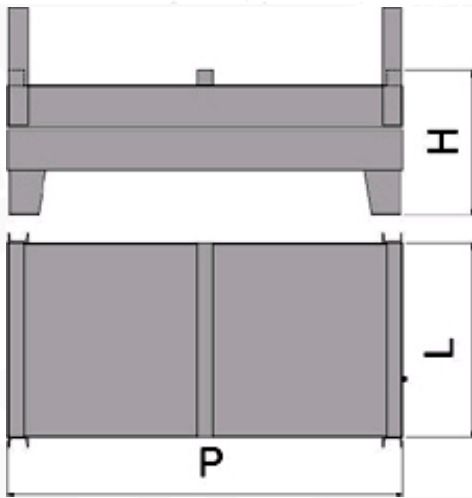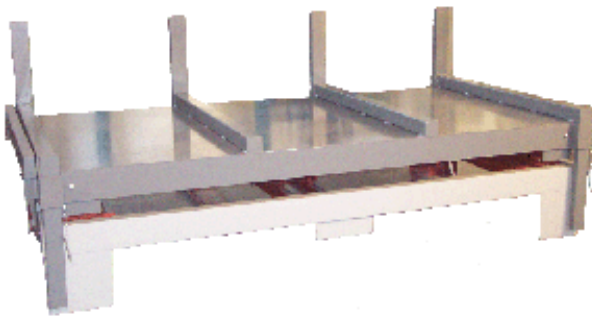

Available versions

Code	Dimensions (LxPxH)	Max Capacity kg	Standard Division g	CE-M Division g (*)	CE-M2 Division g (*)
SWA15	1000 x 2000 x 650	1.500	200	500	200-500
SWA30	1000 x 2000 x 650	3.000	500	1.000	500-1.000
SWB15	1500 x 2000 x 650	1.500	200	500	200-500
SWB30	1500 x 2000 x 650	3.000	500	1.000	500-1.000
SWC15	1000 x 3000 x 650	1.500	200	500	200-500
SWC30	1000 x 3000 x 650	3.000	500	1.000	500-1.000
SWC60	1000 x 3000 x 650	6.000	1.000	2.000	1.000-2.000
SWD30	1500 x 3000 x 650	3.000	500	1.000	500-1.000
SWD60	1500 x 3000 x 650	6.000	1.000	2.000	1.000-2.000

(*) These divisions are obtainable only with the relative options

Options only available at time of order

Code	Description
ECEM1B	CE-M 3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM2B	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
ECEM1C	CE-M 3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
ECEM2C	CE-M 2x3000e initial stamping for class III or IIII scales with capacity from 1501 to 6000 kg
BR3K	Extractable 50 cm extensions per side (capacities from 1500 to 3000 kg)
BR6K	Extractable 50 cm extensions per side (capacities from 4000 to 6000 kg)