


# TPWX3GDI "HAZARDOUS ZONE" SERIES STAINLESS STEEL ATEX PALLET TRUCK SCALE



TPWX3GDI: pallet truck scale in STAINLESS steel, for hazardous zones.

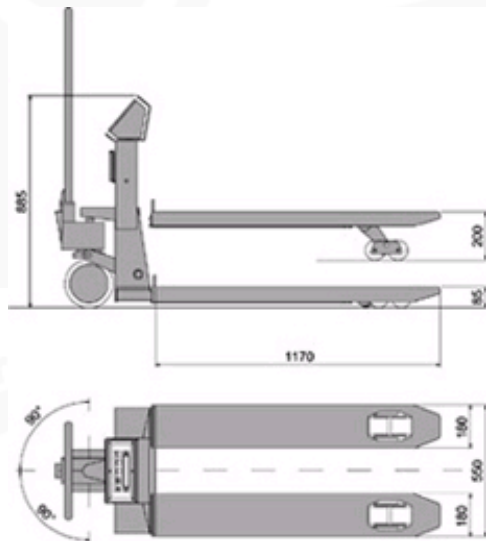

Dimensions in mm

Pallet truck scales, with built-in electronic weighing, suitable for harsh working conditions and dangerous areas classified as hazardous (ZONE 2, 22) in accordance with Ex II 3GD IIC T6 T130°C X protection. The weight detection made with four Atex certified IP68 stainless steel load cells guarantees the precision in all work conditions. Structure entirely in stainless steel Available also CE-M APPROVED.

## MAIN FEATURES

- Maximum lifting capacity: 2000Kg.
- Accuracy: +/- 0.1% of the capacity.
- Fork dimensions 1170 x 550 x 85 mm.
- Weighs about 135 kg.
- **Bearing structure entirely in extra thick STAINLESS steel.**
- **Lifting pump in STAINLESS steel.**
- Steering wheels with rubber coating.
- Double loading rollers with a poliurethane coating.
- Four IP68 STAINLESS steel, Atex certified, shear-beam load cells.
- Weight indicator with **waterproof IP68 STAINLESS STEEL case**, easy to clean and resistant to harsh and corrosive environments; large high contrast 25mm LCD display, easily visible also in poor lighting conditions and waterproof membrane keypad, with 16 numerical/functional keys.
- Calibration and Set-Up parameters configurable from keyboard or from PC.
- Power supply through rechargeable battery, 40-hour approximate operating time.
- Low battery warning. Programmable auto switch-off.
- Equipped with 230Vac 50 Hz battery charger to be recharged in a safe area.

## SELECTABLE FUNCTIONS

- **High Resolution Weighing x 10**
- **Net/Gross or lb/kg conversion**
- **Accumulation**
- **Formula weighing**
- **+/- Checkweighing**
- **Percentage weighing**
- **Counting** (Max. resolution of 1.500.000 divisions)
- **In/Out Truck weighing**
- **Hold and Peak**
- **Peer-to-peer** (up to 4 remote connectable indicators)
- **Set Point Control** (with optional interface)

## KEYBOARD FUNCTIONS

- Zeroing, Automatic tare, Presetable tare, Print and/or data transmission command, Function command.

## OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Alibi memory with time-date.
- Time-Date.
- Parking brake system with command pedal.
- 680 mm fork width (ask for price estimate).
- Special fork length from 850 to 1500 mm (ask for price estimate).
- 3000 kg capacity (ask for price estimate).
- High resolution version (ask for estimate).
- Special wheels available with price estimate.

Code	Max Capacity kg	Division kg	CE-M Division kg
TPWX3GDI20	500 / 1000 / 2000	0,2 / 0,5 / 1	
TPWX3GDI20M <b>M</b>	1000 / 2000		0,5 / 1

#### Options only available at time of order

Code	Description
DFCLK	Real Time Clock (Time/date)
ALMEM	Alibi memory (fiscal memory) with time/date; max. 120.000 weighs
RTV2	Set of steering wheels in Vulkolan (nonstainable)
TPWFRE	Parking brake system with command pedal mounted on steering wheels

#### Accessories

Code	Description
UKPLUG	Power adapter from Schuko to BS1363.
TECMAN	Printed technical manual (free, if downloaded from the web) NET PRICE
UMAN	Printed user manual (free, if downloaded from the web) NET PRICE